


Iris U.S. Customer Service
800.323.9906
www.irisus.com



USIRISEC14



Made in the USA

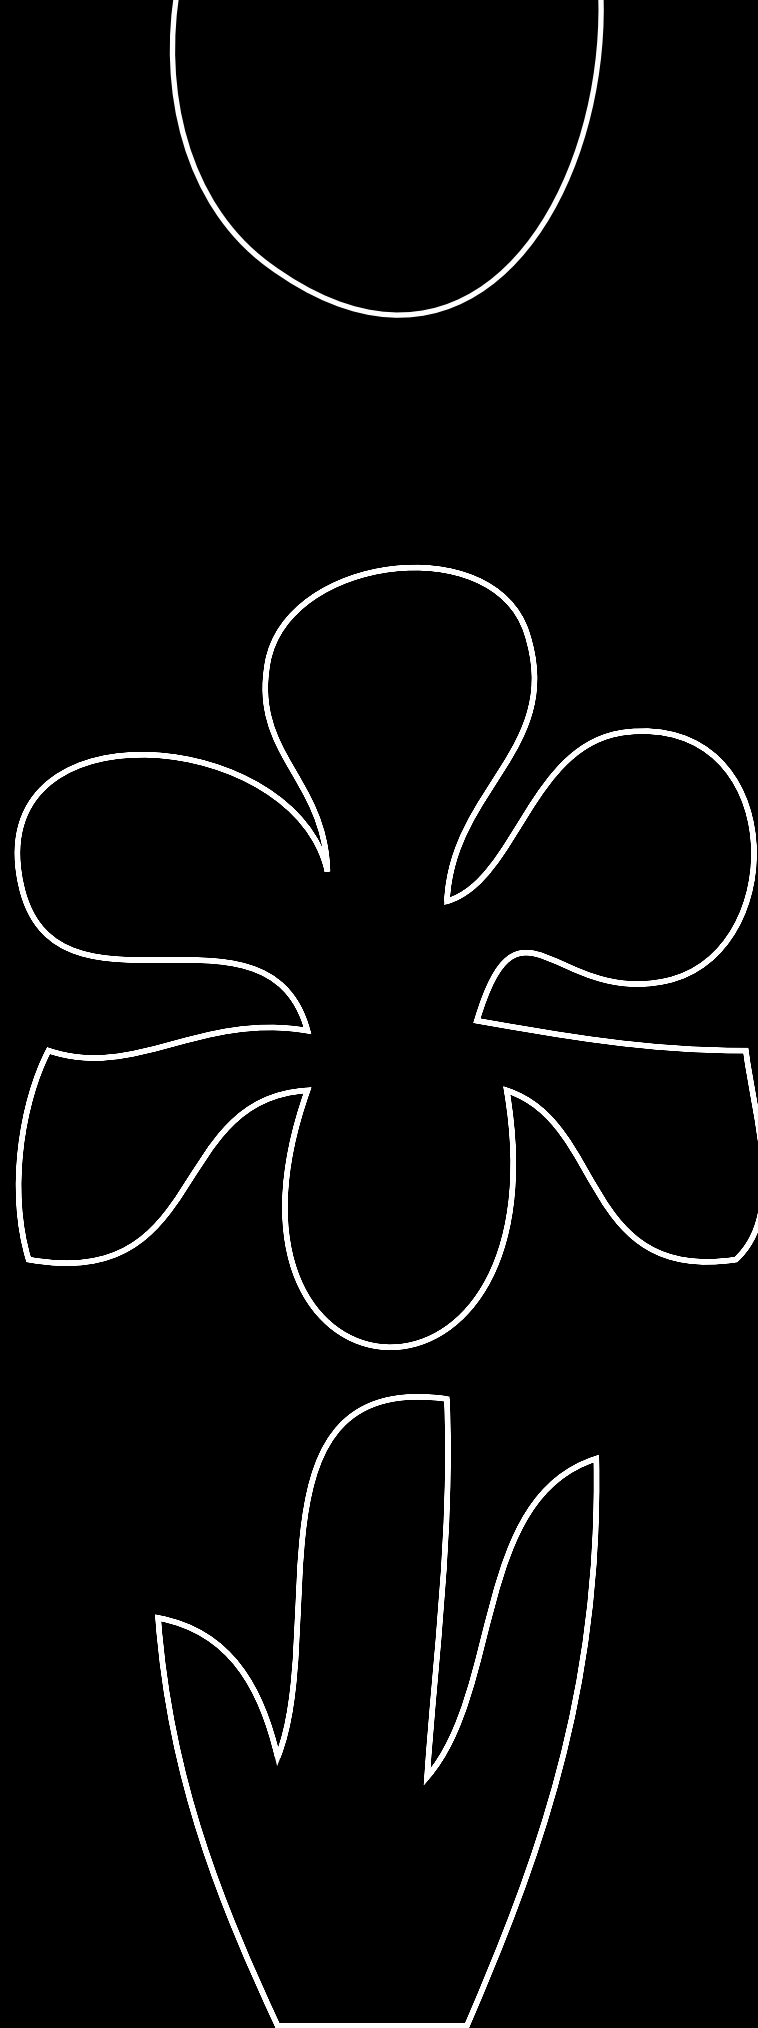

Ecocrete



SIZES 18 x 36 12 x 24

concrete look porcelain tile

Ecocrete Collection



Rectified
18x36 & 6x36 Only



Melted Ice



Honed

Aqua



Honed

Sage



Honed

Weathered Black



Honed

Pressed
Only

12 x 24

Melted Ice

IRG1224129

Aqua

IRG1224128

Sage

IRG1224130

Weathered Black

IRG1224131

Rectified

18 x 36

Melted Ice

IRG1836129

Aqua

IRG1836128

Sage

IRG1836130

Weathered Black

IRG1836131















Aqua



Weathered Black & Aqua














Ecocrete Mosaic




Mosaic

2 x 2

Honed

Melted Ice	IRG12MO129
Aqua	IRG12MO128
Sage	IRG12MO130
Weathered Black	IRG12MO131

Ecocrete Trim



Bullnose

3 x 24

Honed

Melted Ice	IRG324BT129
Aqua	IRG324BT128
Sage	IRG324BT130
Weathered Black	IRG324BT131



Cove Base

6 x 12

Honed

Melted Ice	IRG612C129
Aqua	IRG612C128
Sage	IRG612C130
Weathered Black	IRG612C131



Melted Ice

C1028
COF

Dry ≥ 0.80

Wet ≥ 0.60

Acutest
DCOF

Wet ≥ 0.42

Ecocrete Tech Specs

PHYSICAL PROPERTIES	TEST	INDUSTRY STANDARDS		IRIS US RESULTS COLORED BODY
Water Absorbtion	ASTM C373	0.5% Maximum		≤ 0.1%
Size				
Calibrated (non rectified)	ASTM C499	• Range of Thickness (inch)	0.040	≤ 0.040
	ASTM C499	• Average Facial Dimension	± 0.50%	≤ ± 0.50%
	ASTM C485	• Warpage	± 75% on any edge	≤ ± 0.75%
	ASTM C485	• Warpage	± 50% on diagonal	≤ ± 0.50%
	ASTM C502	• Wedging	± 0.50%	≤ ± 0.50%
Rectified	ASTM C499	• Range of Thickness (inch)	0.040	≤ 0.040
	ASTM C499	• Average Facial Dimension	± 0.25%	≤ 0.25%
	ASTM C485	• Warpage	± 0.40% on any edge	≤ 0.40%
	ASTM C485	• Warpage	± 0.40% on diagonal	≤ 0.40%
	ASTM C502	• Wedging	± 0.25%	≤ 0.25%
Bond Strength	ASTM C482	50 psi or greater		> 200 psi
Deep Abrasion	ASTM C1243	< 175 mm³		< 150 mm³
Hardness (Mohs scale)		No requirement		≥ 7
Frost Resistance (Freeze/Thaw)	ASTM C1026	No sample must show alterations to surface		No cracking or spalling occurred
Chemical Resistance	ASTM C650	No requirement		Class A
Breaking Strength	ASTM C648	250 lbf or greater		≥ 350 lbf
Coefficient of Friction (static)	ASTM C1028	No requirement		Per collection

Data taken from a representative colored body collection. Individual product testing can be conducted by request.

Coefficient of Friction: All values given are for matte or honed material. No values are given for polished material. Iris U.S. does not recommend polished surfaces in areas subject to exposure from grease, oil or water. (All values are based on ASTM C1028 and Acutest DCOF.)

Ecocrete Packaging

PRODUCT	SIZE	BOX PIECES	BOX SF	PALLET BOXES	PALLET SF	THICKNESS	WEIGHT LB/SF
Floor & Wall Tile	12 x 24	8	15.751	32	504.032	8	3.56
	18 x 36	5	22.189	18	399.402	8	3.63
							LB PER PIECE
Mosaic 12 x 12 Sheet	2 x 2	5	4.896	-	-	8	3.56
Bullnose	3 x 24	16	7.793	-	-	8	1.80
Cove Base	6 x 12	8	3.88	-	-	8	1.70